FS-IP5000-M

sentry360

FS-IP5000-M
Camera Specifications

FS-IP5000-M

The FS-IP5000-M is an ultra-compact, 5.0 megapixel 360° security and surveillance network camera. Designed with a discrete form factor, the FS-IP5000-M is a cost-effective, unobtrusive security and surveillance solution for a variety of applications. A built-in Micro-SD slot allows the FS-IP5000-M to be the perfect solution in distributed or standalone surveillance systems.

Technical Specification

- Lens: M12-Mount Fisheye
- Micro-SD Storage
- Motion Detection
- Tamper Detection
- Vandal Proof Dome
- UDP, TCP/IP, HTTP, TFTP, RTP/RTSP
- 100/10 LAN Connection
- Weatherproof Standard: IP66
- Security: Username and password

Dimensions

- 4.6 x 1.9 in (117 x 47.7 mm)
- 0.40 lb (180 g)

Electrical Specification

- PoE 802.3af
- 3.5 watts

Performance Specification

- Field of View: 360°
- Sensor: 5.0MP CMOS
- Maximum Resolution: 2560 x 1920
- Active Pixel Count: 4,915,200
- Maximum Frame Rate: 12 fps (at max res)
- Compression: MJPEG / H.264
- Streaming: Quad H.264 + MJPEG
- 0.04 Lux (color) at F/1.8
- Backlight Compensation
- Wide Dynamic Range
- Dynamic Range: 120 dB
- 3D Noise Reduction
- Full Onvif Compatibility

Environmental Specification

- Operating Temperature: -4° — 122° F
  -20° — 50° C
- Humidity: 10% to 90%, No condensation

Warranty

- 3 Year, Parts and Labor

Images

1

2

Dimensional Outline

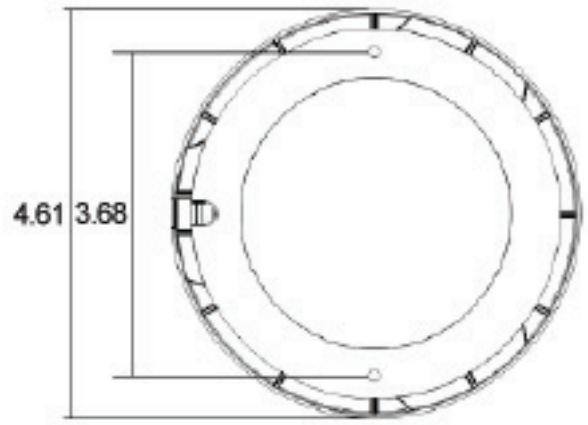

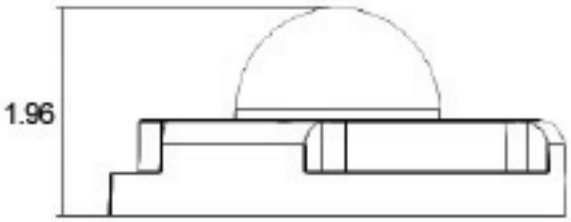

Unit: Inches